

Product Mark

Model: paneeli120 3000k

Temperature: 20□

Tester: admin

Manufacture: LedStore.fi


Humidity: 65%

Test Date: 2018-01-02


Parameter

Name	Value	Name	Value	Name	Value
E(lx)	544.84	Ra	94.0	Bink Freq(Hz)	-
CCT(K)	2900	S/P	1.4	Fluctuate Depth	-
Duv	-0.0002	X	872.4	Bink Percent	-
CIE(x,y)	0.4439, 0.4060	Y	797.7	Bink Exponent	-
CIE(u,v)	0.2543, 0.3488	Z	294.9	PAR(W/m2)	-
Dominant Wave(nm)	583.3	Rf	-	PPFD(umol/m2/s)	-
Purity	55.1%	Rg	-	YPFD(umol/m2/s)	-
Color Ratio(RGB)	25.1% 73.0% 1.9%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	624.7			Eb(W/m2)	-
Half Width(nm)	159.2			Ey(W/m2)	-
Candle E(fc)	50.64			Er(W/m2)	-
Ee(W/m2)	1.918			Erb Ratio	



Spectrogram

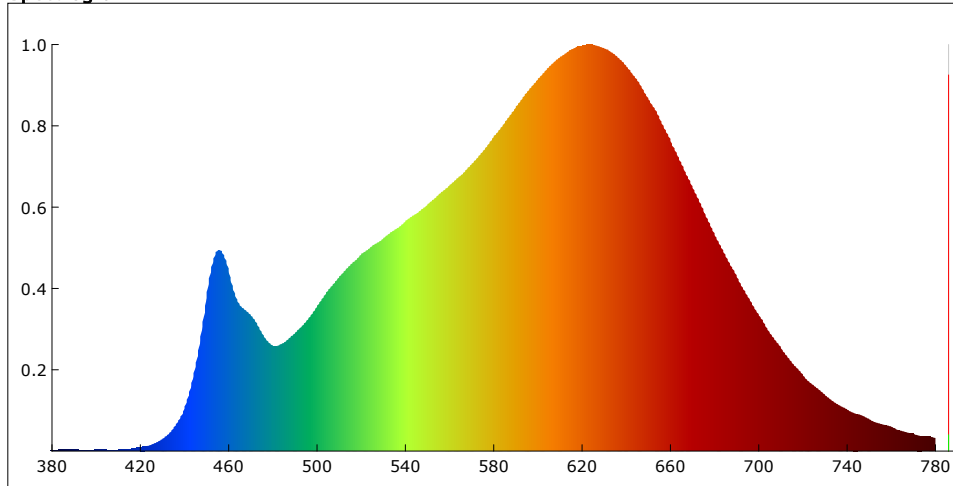

CIE1931

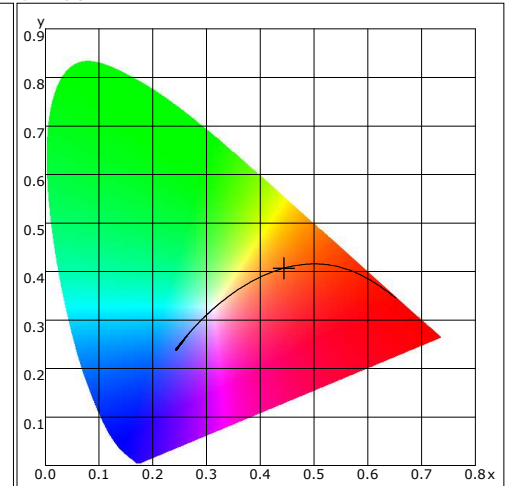

CRI

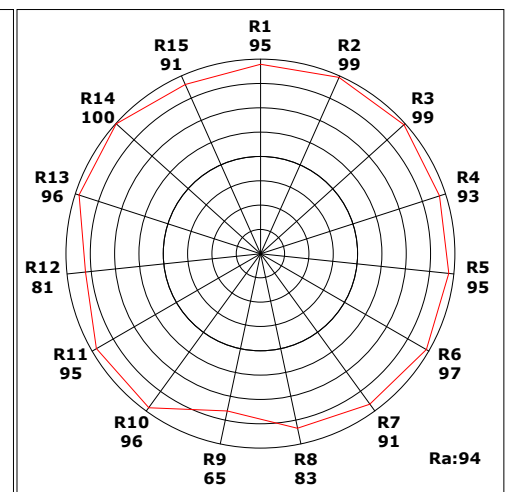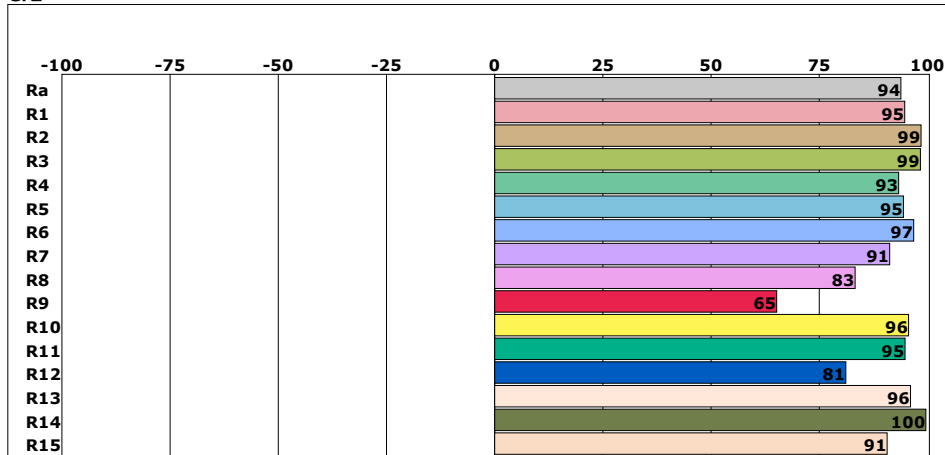

Instrument Status

Type: LMS-6000

VDark: 2674

Integral Time: 320.000ms

Scan Range: 380-780nm

VPeak: 60648

SN: 201710272

Remark: