

Product Mark

Model: paneeli200 4000k

Temperature: 20□

Tester: admin

Manufacture: LedStore.fi


Humidity: 65%

Test Date: 2018-01-02


Parameter

Name	Value	Name	Value	Name	Value
E(lx)	1855.12	Ra	90.3	Bink Freq(Hz)	-
CCT(K)	3880	S/P	1.8	Fluctuate Depth	-
Duv	0.0002	X	2754.4	Bink Percent	-
CIE(x,y)	0.3861, 0.3807	Y	2716.1	Bink Exponent	-
CIE(u,v)	0.2272, 0.3361	Z	1663.8	PAR(W/m2)	-
Dominant Wave(nm)	579.4	Rf	-	PPFD(umol/m2/s)	-
Purity	30.1%	Rg	-	YPFD(umol/m2/s)	-
Color Ratio(RGB)	19.8% 77.5% 2.8%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	454.4			Eb(W/m2)	-
Half Width(nm)	27.8			Ey(W/m2)	-
Candle E(fc)	172.41			Er(W/m2)	-
Ee(W/m2)	6.021			Erb Ratio	



Spectrogram

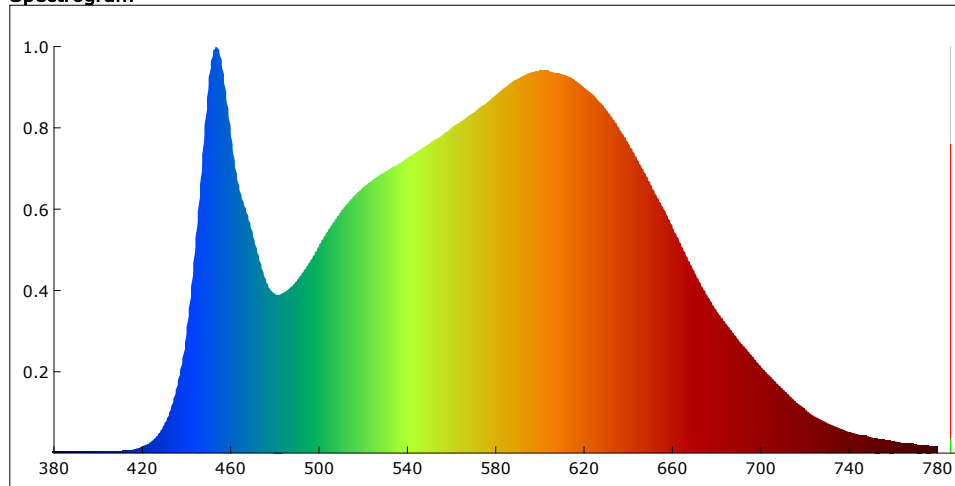

CIE1931

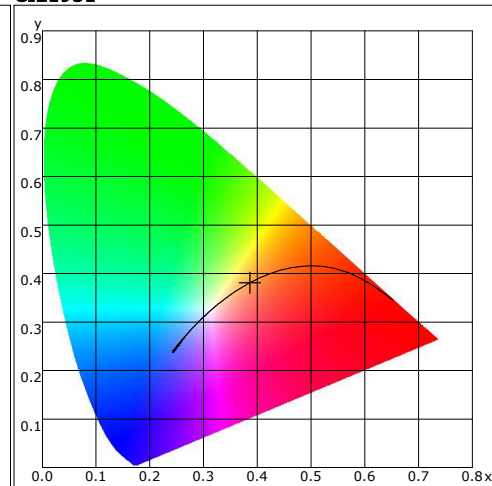

CRI

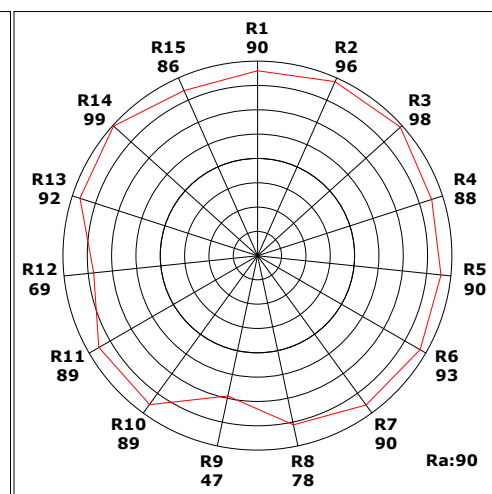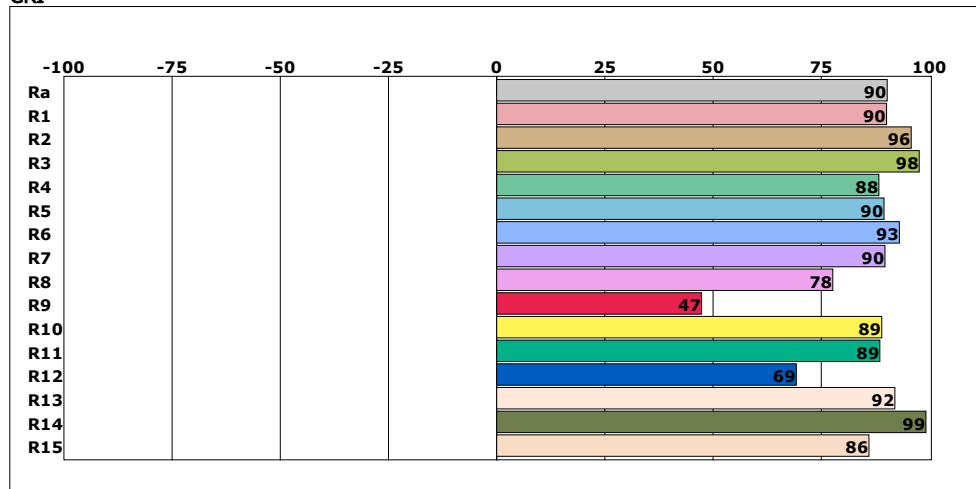

Instrument Status

Type: LMS-6000

VDark: 2245

Integral Time: 85.000ms

Scan Range: 380-780nm

VPeak: 49745

SN: 201710272

Remark: