

Product Mark

Model: panel300.3000k

Temperature: 20℃

Tester: admin

Manufacture: LedStore.fi


Humidity: 65%

Test Date: 2018-01-02


Parameter

Name	Value	Name	Value	Name	Value
E(lx)	1191.63	Ra	93.9	Bink Freq(Hz)	-
CCT(K)	2889	S/P	1.4	Fluctuate Depth	-
Duv	0.0012	X	1899.8	Bink Percent	-
CIE(x,y)	0.4470, 0.4105	Y	1744.7	Bink Exponent	-
CIE(u,v)	0.2543, 0.3503	Z	605.7	PAR(W/m2)	-
Dominant Wave(nm)	582.9	Rf	-	PPFD(umol/m2/s)	-
Purity	57.4%	Rg	-	YPFD(umol/m2/s)	-
Color Ratio(RGB)	25.0% 73.5% 1.5%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	628.8			Eb(W/m2)	-
Half Width(nm)	162.2			Ey(W/m2)	-
Candle E(fc)	110.75			Er(W/m2)	-
Ee(W/m2)	4.215			Erb Ratio	



Spectrogram

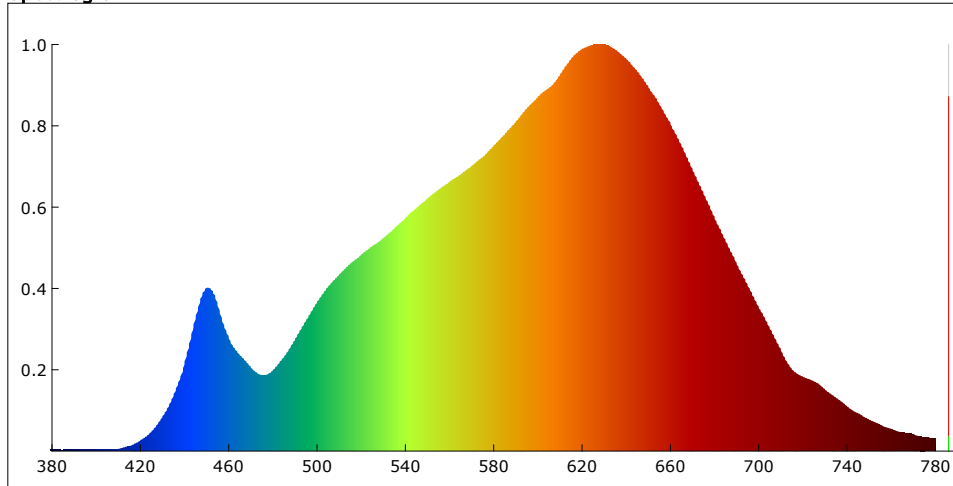

CIE1931

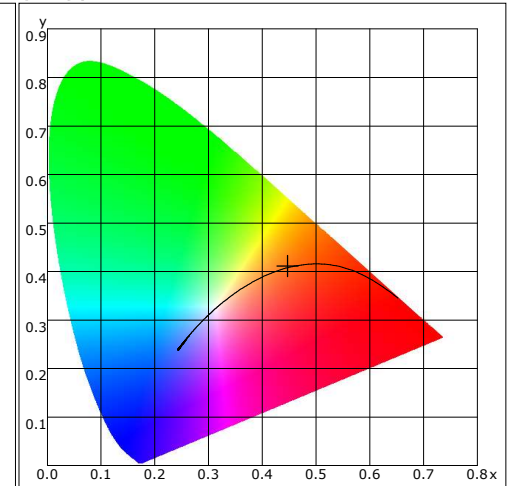

CRI

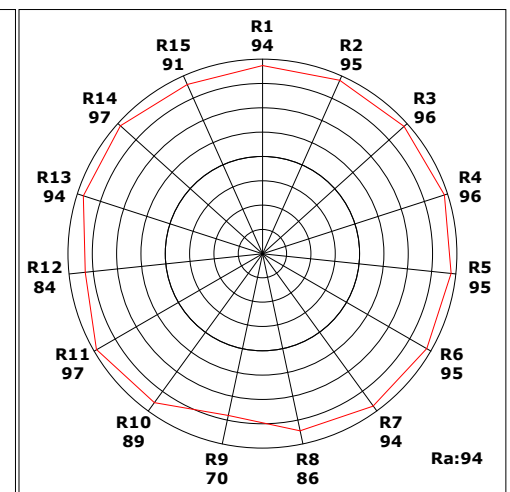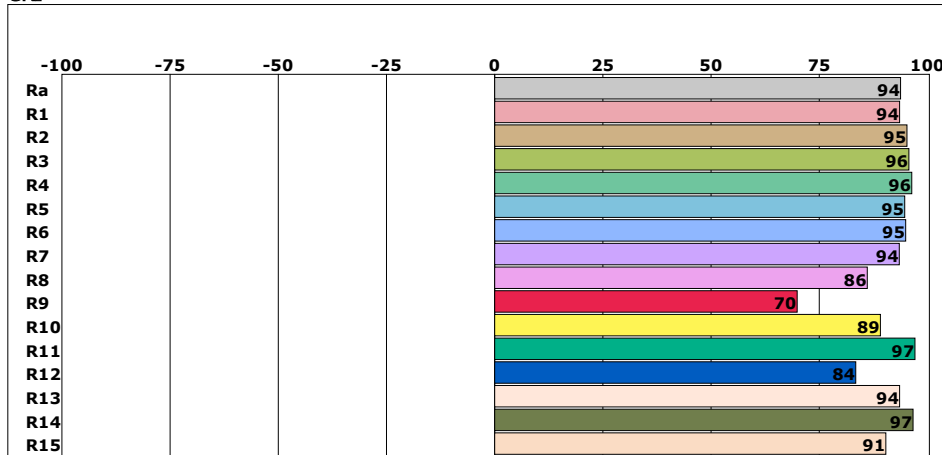

Instrument Status

Type: LMS-6000

VDark: 2369

Integral Time: 140.000ms

Scan Range: 380-780nm

VPeak: 57130

SN: 201710272

Remark: