

Product Mark

Model: RINKELI 60 riippuväläisin

Temperature: 20°C

Tester: LedStore.fi

Manufacture: LedStore.fi


Humidity: 65%

Test Date: 2018-08-01


Parameter

Name	Value	Name	Value	Name	Value
E(lx)	18328.27	Ra	93.0	Bink Freq(Hz)	-
CCT(K)	3940	S/P	1.9	Fluctuate Depth	-
Duv	-0.0004	X	27218.0	Bink Percent	-
CIE(x,y)	0.3828, 0.3774	Y	26834.9	Bink Exponent	-
CIE(u,v)	0.2264, 0.3348	Z	17046.6	PAR(W/m2)	-
Dominant Wave(nm)	579.5	Rf	-	PPFD(umol/m2/s)	-
Purity	28.2%	Rg	-	YPFD(umol/m2/s)	-
Color Ratio(RGB)	20.5% 75.9% 3.6%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	460.5			Eb(W/m2)	-
Half Width(nm)	32.8			Ey(W/m2)	-
Candle E(fc)	1703.37			Er(W/m2)	-
Ee(W/m2)	65.734			Erb Ratio	



Spectrogram

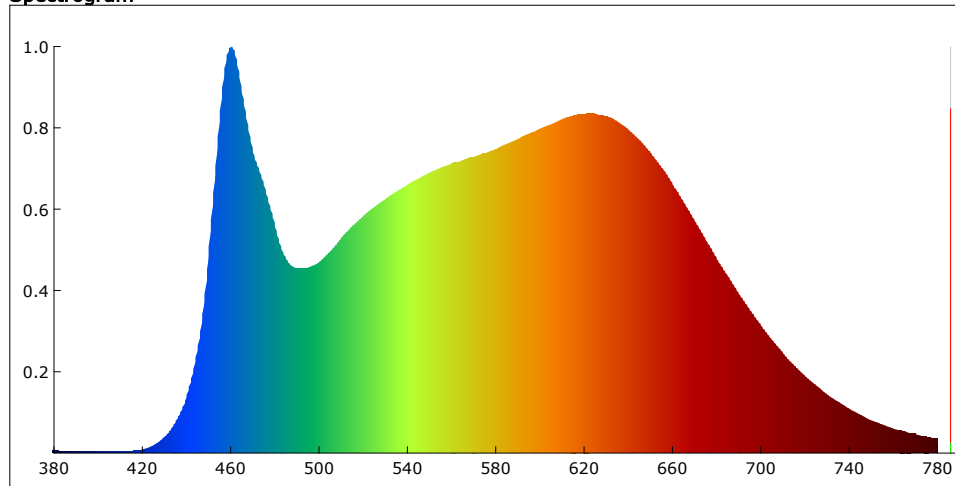

CIE1931

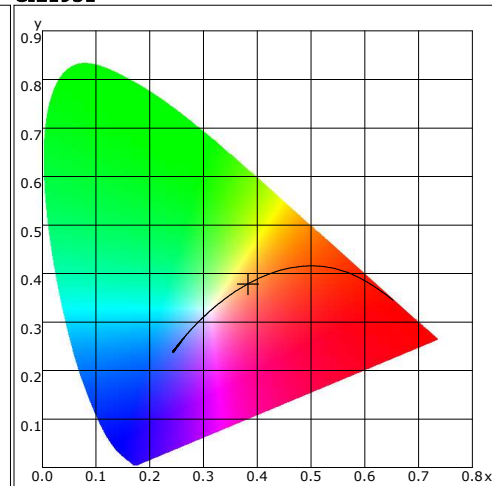

CRI

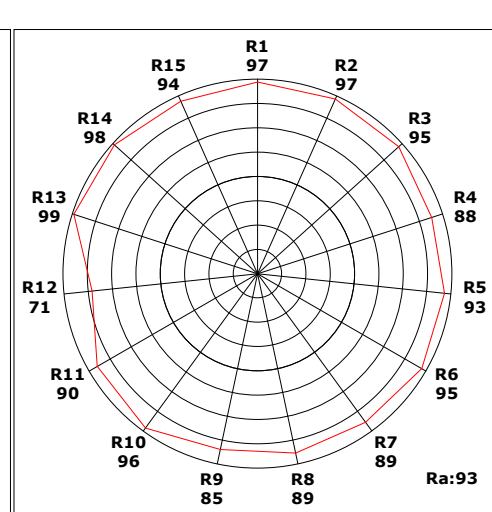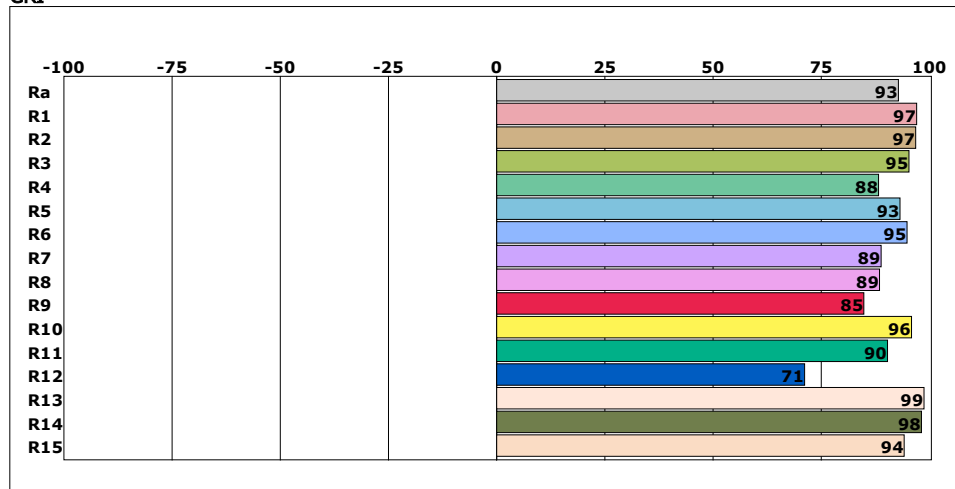

Instrument Status

Type: LMS-6000

VDark: 1664

Integral Time: 9.000ms

Scan Range: 380-780nm

VPeak: 55558

SN: 0

Remark: