

Product Mark


Model: GU10 3000K LedStore.fi
Temperature: 20□
Tester: LedStore.fi

Manufacture: LedStore.fi
Humidity: 65%
Test Date: 2018-08-02


Parameter

Name	Value	Name	Value	Name	Value
E(lx)	9860.58	Ra	98.0	Bink Freq(Hz)	-
CCT(K)	3076	S/P	1.5	Fluctuate Depth	-
Duv	-0.0014	X	15581.9	Bink Percent	-
CIE(x,y)	0.4297, 0.3981	Y	14437.2	Bink Exponent	-
CIE(u,v)	0.2484, 0.3453	Z	6243.5	PAR(W/m2)	-
Dominant Wave(nm)	583.0	Rf	-	PPFD(umol/m2/s)	-
Purity	48.5%	Rg	-	YFPD(umol/m2/s)	-
Color Ratio(RGB)	24.8% 73.2% 2.0%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	634.7			Eb(W/m2)	-
Half Width(nm)	175.8			Ey(W/m2)	-
Candle E(fc)	916.41			Er(W/m2)	-
Ee(W/m2)	37.596			Erb Ratio	



Spectrogram

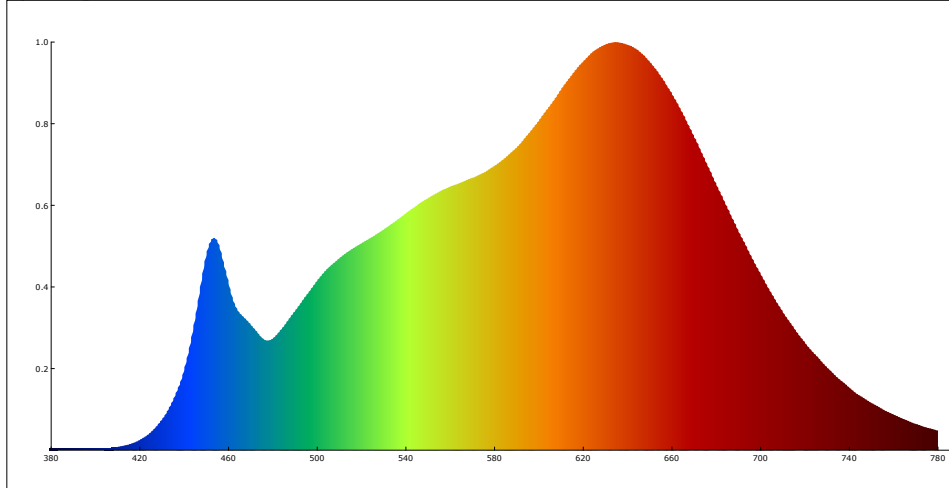

CIE1931

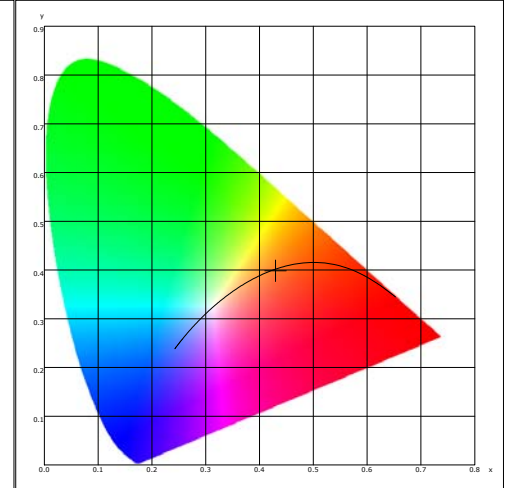

CRI

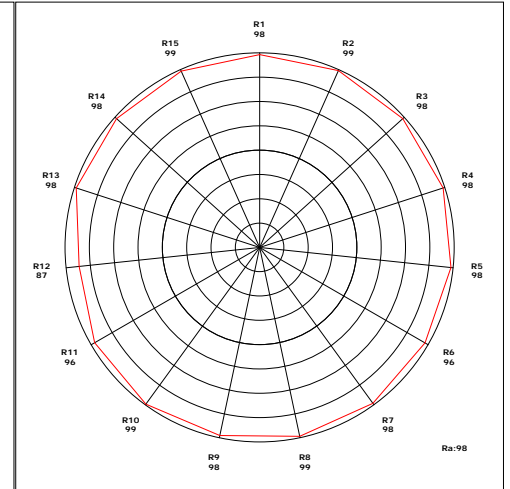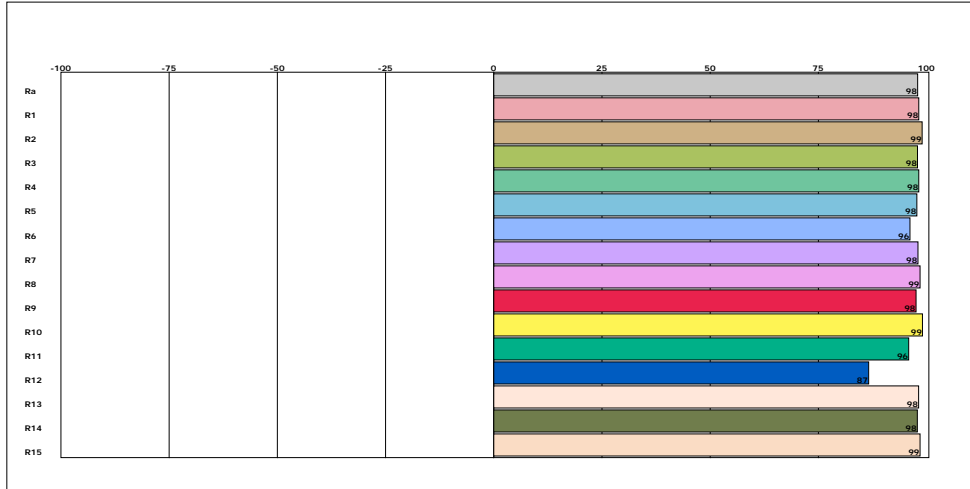

Instrument Status

Type: LMS-6000
VDark: 1266

Integral Time: 20.000ms
Scan Range: 380-780nm

VPeak: 63127
SN: 0

Remark: