

Product Mark


Model: GU10 4000K LedStore.fi
Temperature: 20□
Tester: LedStore.fi

Manufacture: LedStore.fi
Humidity: 65%
Test Date: 2018-08-02


Parameter

Name	Value	Name	Value	Name	Value
E(lx)	13700.87	Ra	98.1	Bink Freq(Hz)	-
CCT(K)	4095	S/P	1.9	Fluctuate Depth	-
Duv	-0.0009	X	20264.6	Bink Percent	-
CIE(x,y)	0.3758, 0.3720	Y	20059.8	Bink Exponent	-
CIE(u,v)	0.2239, 0.3325	Z	13603.7	PAR(W/m2)	-
Dominant Wave(nm)	579.2	Rf	-	PPFD(umol/m2/s)	-
Purity	24.4%	Rg	-	YPFD(umol/m2/s)	-
Color Ratio(RGB)	20.2% 76.9% 2.9%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	452.7			Eb(W/m2)	-
Half Width(nm)	26.8			Ey(W/m2)	-
Candle E(fc)	1273.32			Er(W/m2)	-
Ee(W/m2)	50.135			Erb Ratio	



Spectrogram

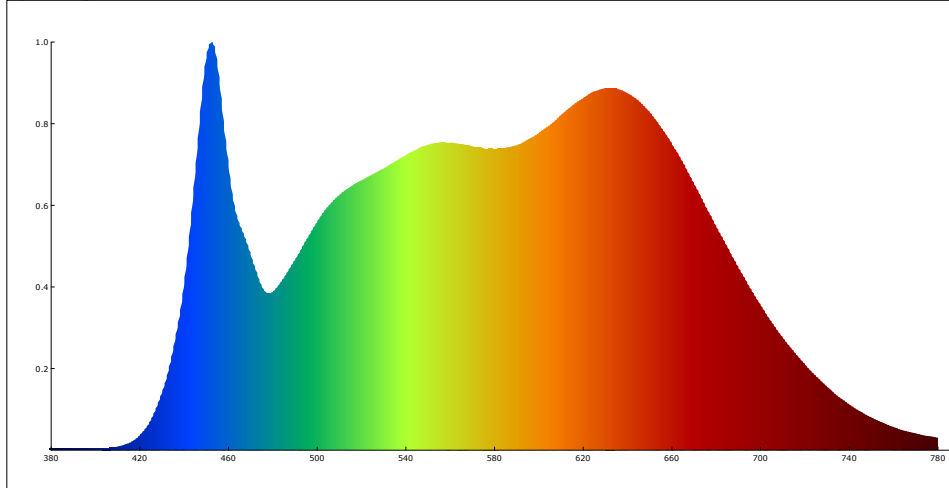

CIE1931

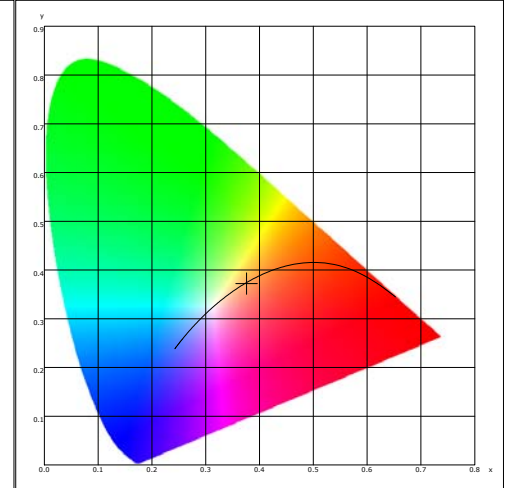

CRI

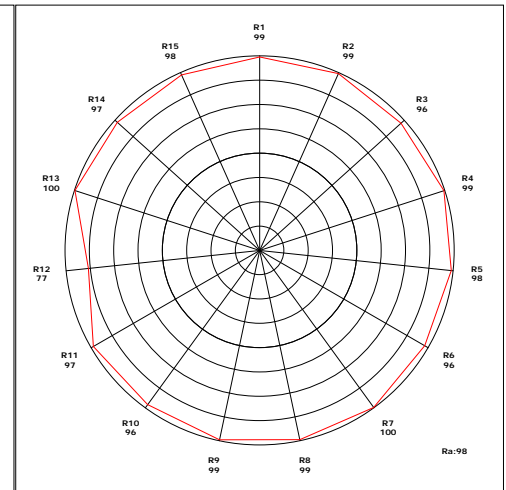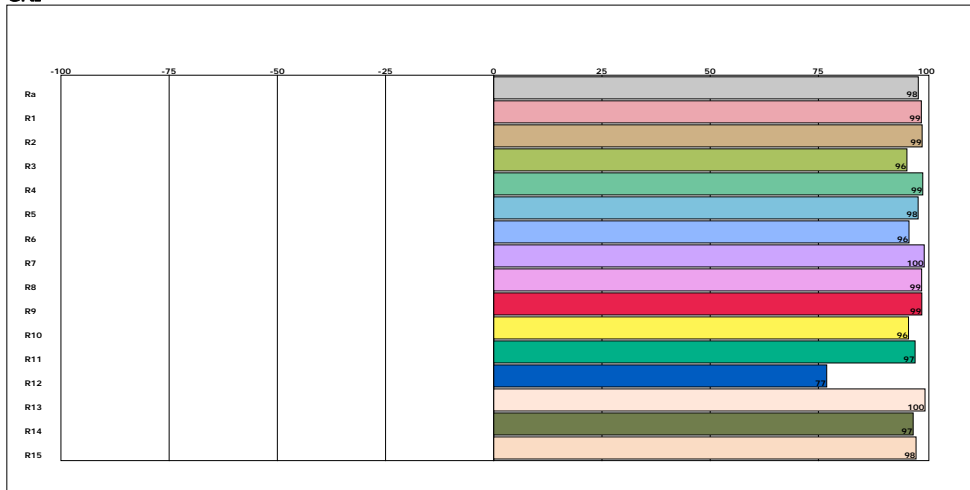

Instrument Status

Type: LMS-6000
VDark: 1737

Integral Time: 13.000ms
Scan Range: 380-780nm

VPeak: 56107
SN: 0

Remark: