

**Product Mark**


Model: modledip24 3000k  
Temperature: 20□  
Tester: admin

Manufacture: LedStore.fi  
Humidity: 65%  
Test Date: 2018-01-02


**Parameter**

Name	Value	Name	Value	Name	Value
E(lx)	7388.23	Ra	97.3	Bink Freq(Hz)	-
CCT(K)	3065	S/P	1.5	Fluctuate Depth	-
Duv	-0.0000	X	11620.7	Bink Percent	-
CIE(x,y)	0.4323, 0.4025	Y	10817.3	Bink Exponent	-
CIE(u,v)	0.2483, 0.3467	Z	4440.1	PAR(W/m2)	-
Dominant Wave(nm)	582.5	Rf	-	PPFD(umol/m2/s)	-
Purity	50.6%	Rg	-	YFPD(umol/m2/s)	-
Color Ratio(RGB)	24.7% 73.6% 1.7%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	639.8			Eb(W/m2)	-
Half Width(nm)	176.1			Ey(W/m2)	-
Candle E(fc)	686.64			Er(W/m2)	-
Ee(W/m2)	28.489			Erb Ratio	-



**Spectrogram**

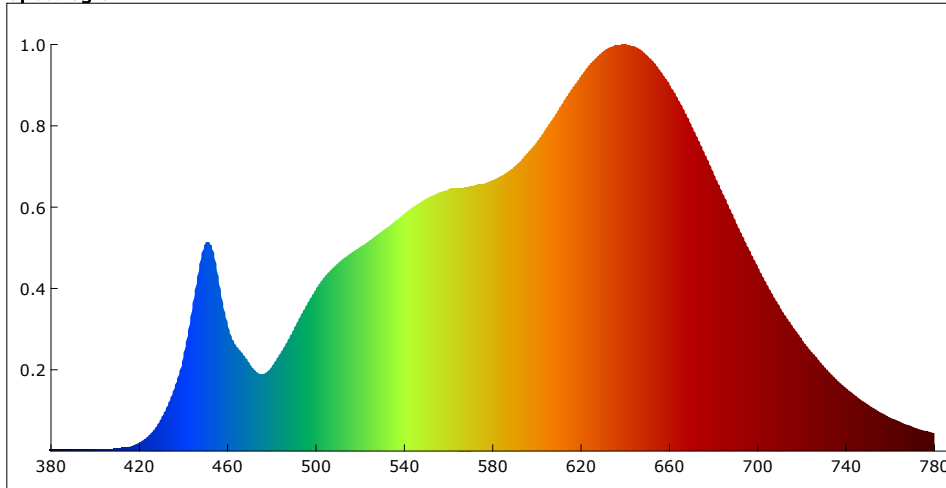

**CIE1931**

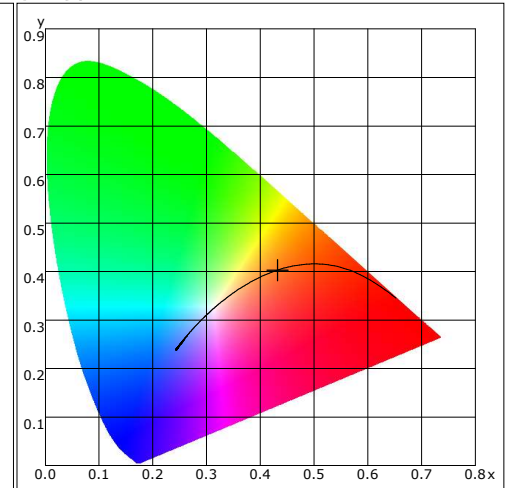

**CRI**

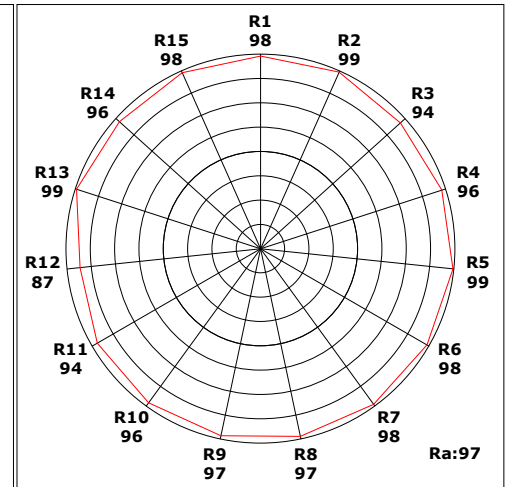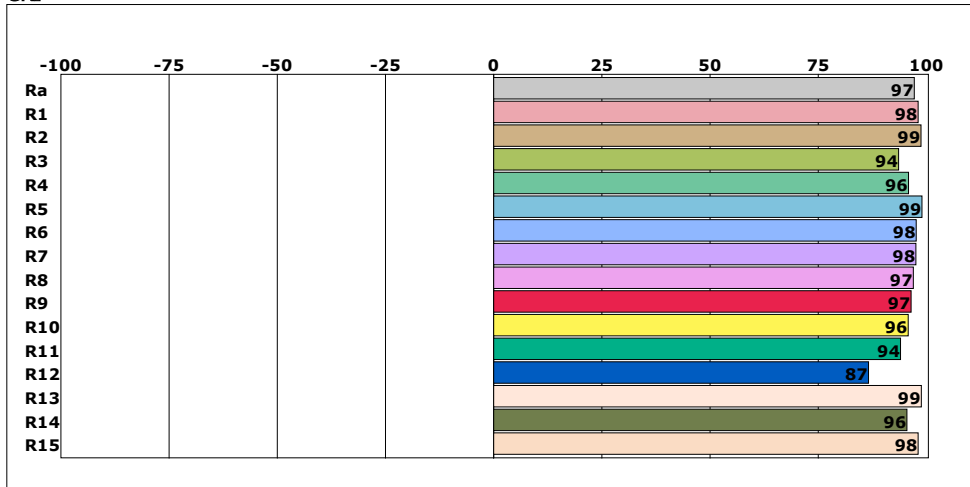

**Instrument Status**

Type: LMS-6000  
VDark: 2134

Integral Time: 23.000ms  
Scan Range: 380-780nm

VPeak: 55888  
SN: 201710272

Remark: