

Product Mark


Model: kehys modled 24 4000k
Temperature: 20□
Tester: admin

Manufacture: LedStore.fi
Humidity: 65%
Test Date: 2018-01-02


Parameter

Name	Value	Name	Value	Name	Value
E(lx)	1053.27	Ra	97.0	Bink Freq(Hz)	-
CCT(K)	3828	S/P	1.8	Fluctuate Depth	-
Duv	0.0015	X	1558.2	Bink Percent	-
CIE(x,y)	0.3896, 0.3856	Y	1542.1	Bink Exponent	-
CIE(u,v)	0.2276, 0.3378	Z	899.4	PAR(W/m2)	-
Dominant Wave(nm)	579.0	Rf	-	PPFD(umol/m2/s)	-
Purity	32.6%	Rg	-	YFPD(umol/m2/s)	-
Color Ratio(RGB)	20.8% 76.8% 2.4%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	638.8			Eb(W/m2)	-
Half Width(nm)	201.4			Ey(W/m2)	-
Candle E(fc)	97.89			Er(W/m2)	-
Ee(W/m2)	3.887			Erb Ratio	-



Spectrogram

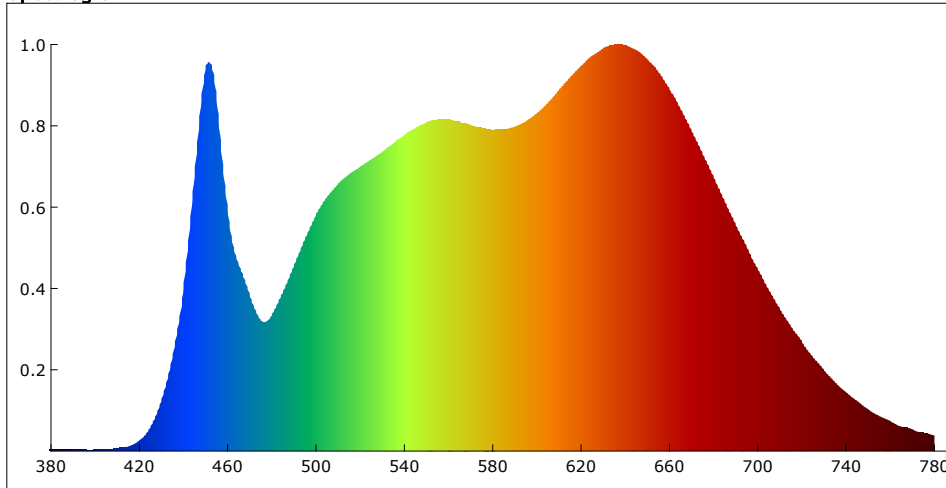

CIE1931

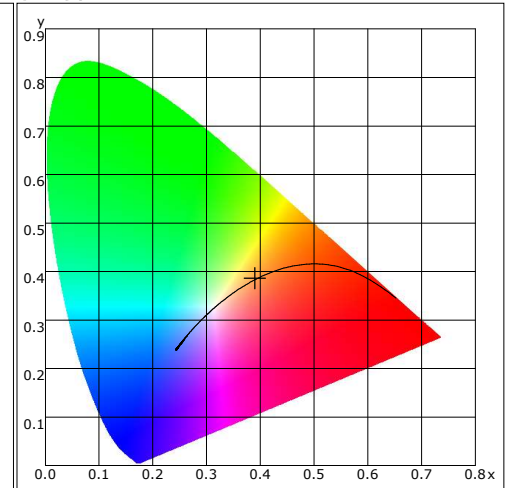

CRI

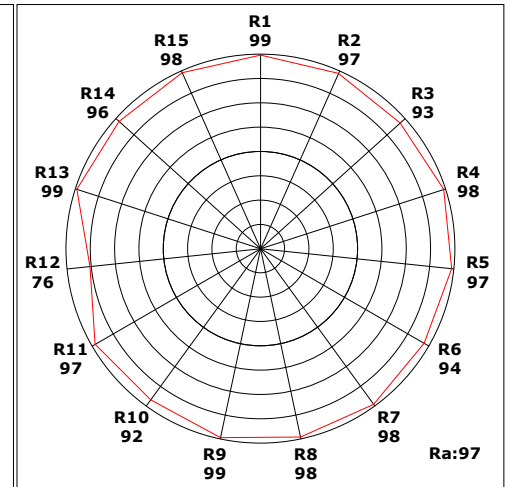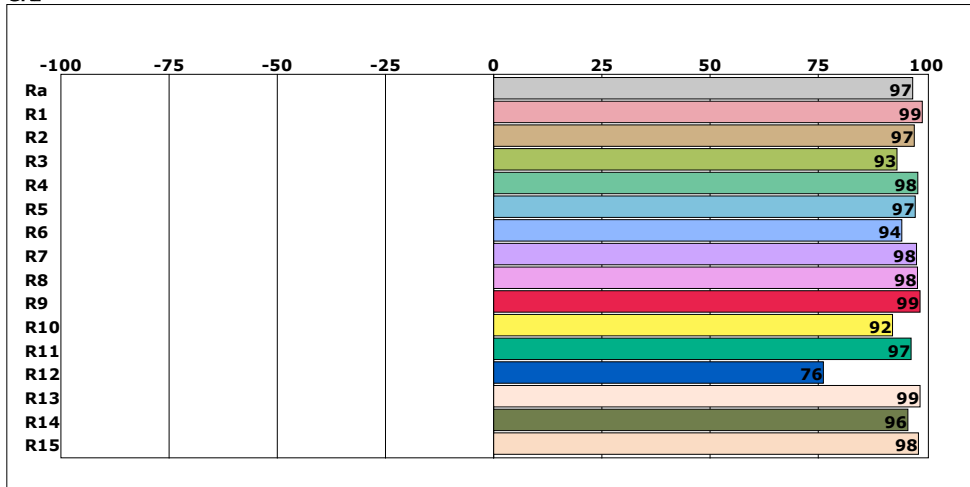

Instrument Status

Type: LMS-6000
VDark: 2292

Integral Time: 160.000ms
Scan Range: 380-780nm

VPeak: 50559
SN: 201710272

Remark: