

Product Mark


Model: MR16/GU5.3 3000K LedStore.fi
Temperature: 20□
Tester: LedStore.fi

Manufacture: LedStore.fi
Humidity: 65%
Test Date: 2018-08-02


Parameter

Name	Value	Name	Value	Name	Value
E(lx)	18792.86	Ra	98.3	Bink Freq(Hz)	-
CCT(K)	3062	S/P	1.5	Fluctuate Depth	-
Duv	-0.0004	X	29614.2	Bink Percent	-
CIE(x,y)	0.4320, 0.4014	Y	27515.2	Bink Exponent	-
CIE(u,v)	0.2485, 0.3464	Z	11418.6	PAR(W/m2)	-
Dominant Wave(nm)	582.7	Rf	-	PPFD(umol/m2/s)	-
Purity	50.2%	Rg	-	YPFD(umol/m2/s)	-
Color Ratio(RGB)	24.8% 73.3% 1.9%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	635.8			Eb(W/m2)	-
Half Width(nm)	174.4			Ey(W/m2)	-
Candle E(fc)	1746.55			Er(W/m2)	-
Ee(W/m2)	71.211			Erb Ratio	



Spectrogram

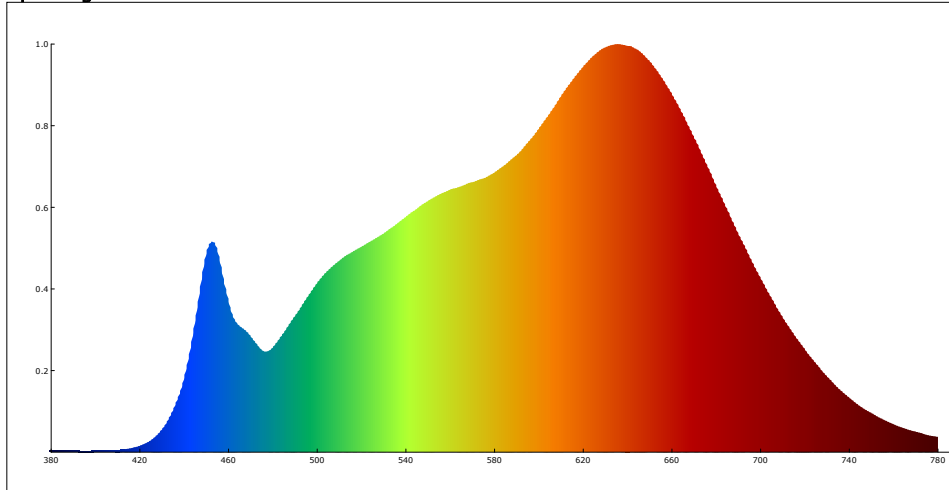

CIE1931

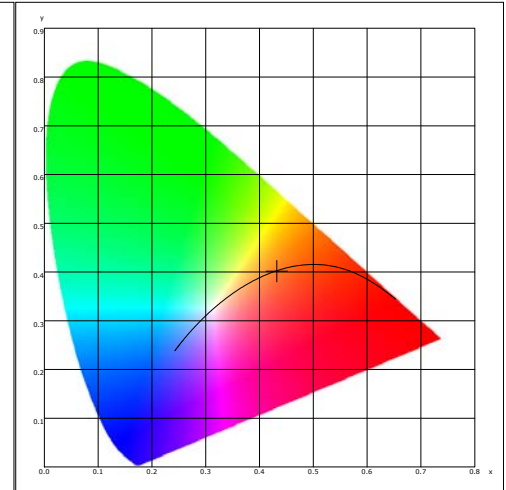

CRI

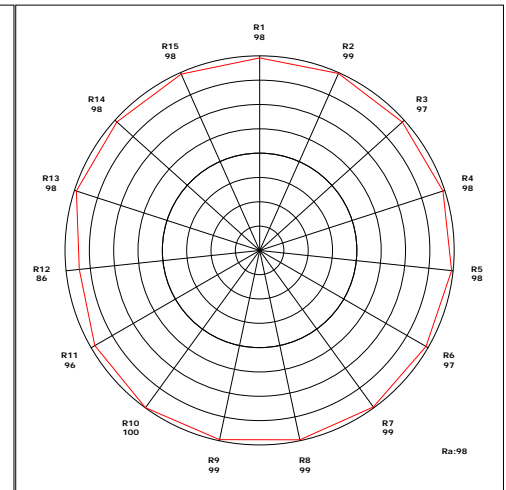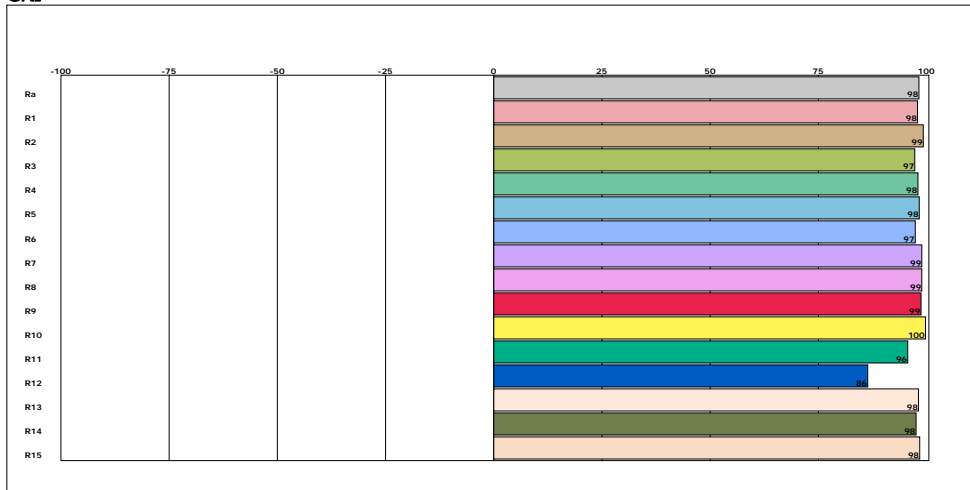

Instrument Status

Type: LMS-6000
VDark: 1782

Integral Time: 8.000ms
Scan Range: 380-780nm

VPeak: 49195
SN: 0

Remark: