

**Product Mark**


Model: MR16/GU5.3 4000K LedStore.fi  
Temperature: 20□  
Tester: LedStore.fi

Manufacture: LedStore.fi  
Humidity: 65%  
Test Date: 2018-08-02


**Parameter**

Name	Value	Name	Value	Name	Value
E(lx)	4250.27	Ra	98.2	Bink Freq(Hz)	-
CCT(K)	3998	S/P	1.8	Fluctuate Depth	-
Duv	-0.0000	X	6284.3	Bink Percent	-
CIE(x,y)	0.3805, 0.3768	Y	6222.9	Bink Exponent	-
CIE(u,v)	0.2251, 0.3344	Z	4009.4	PAR(W/m2)	-
Dominant Wave(nm)	579.1	Rf	-	PPFD(umol/m2/s)	-
Purity	27.3%	Rg	-	YPFD(umol/m2/s)	-
Color Ratio(RGB)	20.5% 76.7% 2.8%	Ebh(mW/m2)	-	Ep(W/m2)	-
Peak Wave(nm)	452.7			Eb(W/m2)	-
Half Width(nm)	25.6			Ey(W/m2)	-
Candle E(fc)	395.01			Er(W/m2)	-
Ee(W/m2)	15.588			Erb Ratio	



**Spectrogram**

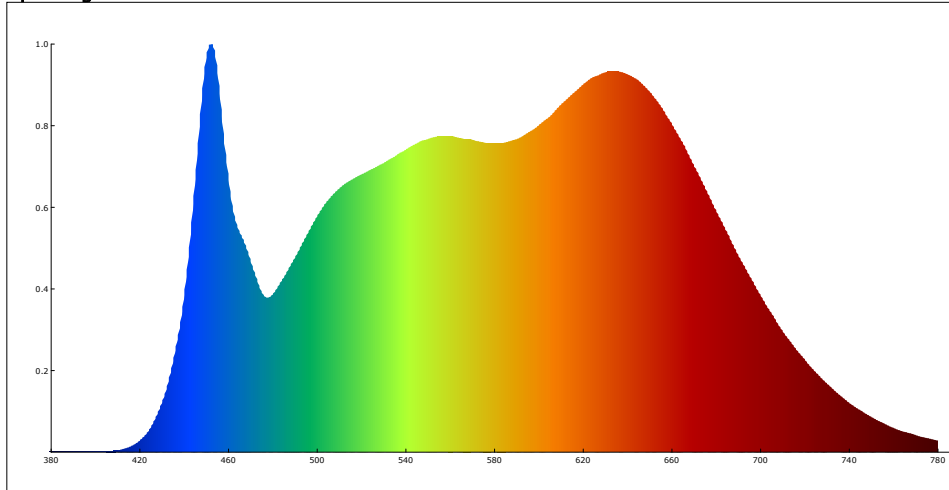

**CIE1931**

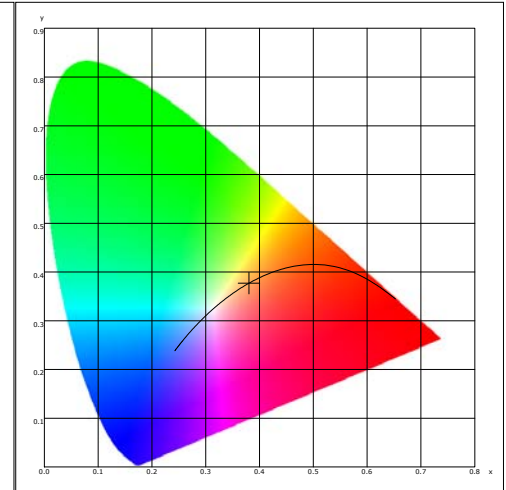

**CRI**

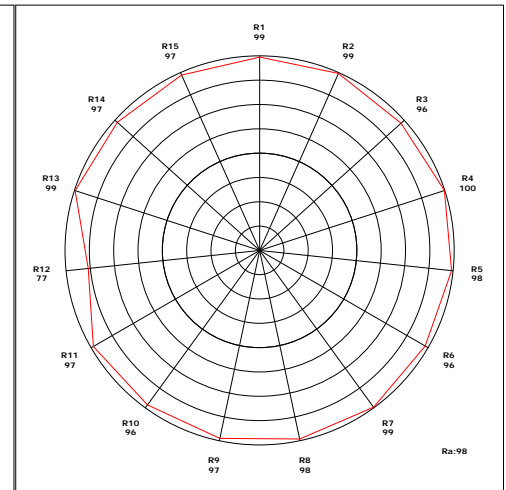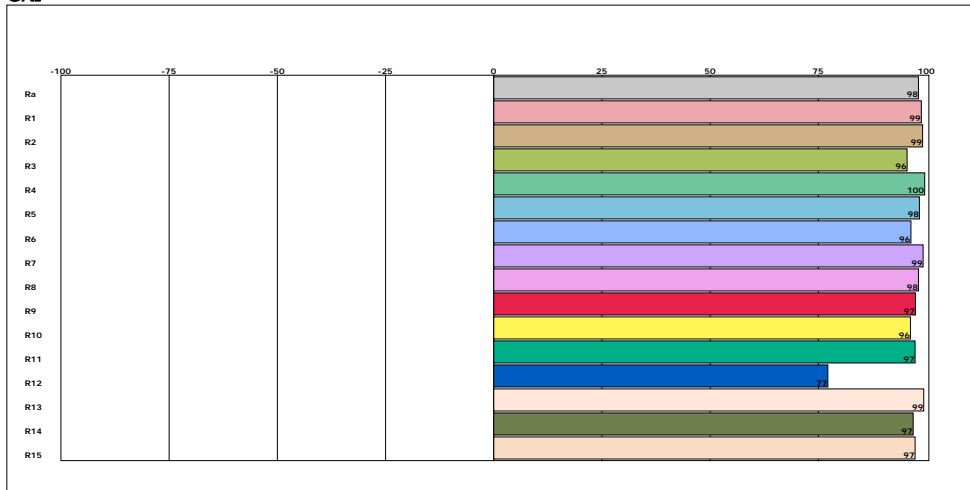

**Instrument Status**

Type: LMS-6000  
VDark: 1887

Integral Time: 44.000ms  
Scan Range: 380-780nm

VPeak: 56128  
SN: 0

Remark: